






## LEED version 4.1

### Product Data for Building Certification

# URBANSCAPE GREEN ROOF SYSTEMS

**LEEDv4.1** (Leadership in Energy and Environmental Design) is a voluntary standard that defines high performance green buildings which are healthier, more environmentally responsible, and more profitable structures. Credits for certification can be earned in various categories, each with a unique focus on sustainable design: sustainable sites, water efficiency, energy and atmosphere, materials and resources, indoor environmental quality, innovation and design process.






**KNAUF INSULATION** products can put you on the right track for the highest result for certification.

LEED Credit Category code	LEEDv4 Definition	Knauf Insulation Products contribution	Contributes towards
<b>Sustainable Sites</b>  Rainwater management	To reduce runoff volume and improve water quality by replicating the natural hydrology and water balance of the site.	Urbanscape products are a rainwater control system that helps reducing peak rate of runoff from the site. See annexe 1: Urbanscape Green Roof Performance Evaluation Tool.	<b>3 points</b>
<b>Sustainable Sites</b>  Heat Island Reduction	To minimize effects on microclimates and human and wildlife habitats by reducing heat islands.	Temperatures on the roof can be up to 45°C lower which reduce heat island effect and extend life of waterproofing (up to 50%).	<b>2 points</b>
<b>Sustainable Sites</b>  Protect or restore habitats	To conserve existing natural areas and restore damages areas to provide habitat and promote biodiversity.	The Urbanscape vegetated roof is counted toward the overall restored area calculation.	<b>2 points</b>
<b>Sustainable Sites</b>  Open Space	To create exterior open space that encourages interaction with the environment, social interaction, passive recreation, and physical activities.	Vegetated roof is an open space qualified for its environmental benefits. The presence of green areas has a relaxing psychological effect, helps to reduce blood pressure and lowers the heartbeat.	<b>1 point</b>
<b>Energy and Atmosphere (EA)</b>  Optimize Energy Performance	To achieve increasing levels of performance to reduce environmental and economic harms of excessive energy use.	Urbanscape products help reducing heating/cooling energy demand. See annexe 1: Urbanscape Green Roof Performance Evaluation Tool.	<b>18 points</b>

## LEED version 4.1



### Product Data for Building Certification

# URBANSCAPE GREEN ROOF SYSTEMS

LEED Credit Category code	LEEDv4 Definition	Knauf Insulation Products contribution	Contributes towards
<b>Materials and Resources ( MR)</b>  Building Product Disclosure and Optimization – Environmental Product Declarations	To reward project including products with verified Life Cycle Assessment (LCA) and have environmentally, economically and socially preferable LCA.	Third party verified Environmental Product Declarations (EDPs) are available on line for URBANSCAPE Extensive Green Roof System <sup>1</sup> .	<b>2 points</b> 
<b>Materials and Resources( MR)</b>  Building Product Disclosure and Optimization – Sourcing of Raw Materials	To reward project including products verified to be extracted or sourced in a responsible manner.	The Knauf Sustainability Report follows the Global Reporting Initiative (GRI) structure and gives detailed information about the sourcing of raw materials and recycled content.	<b>1 point</b>
<b>Materials and Resources ( MR)</b>  Building Product Disclosure and Optimization – Material Ingredients	To reward project for which the products chemical ingredients are inventoried.	Green roll for Urbanscape products contains no ingredients listed on the REACH Authorization list, Restriction list or Substances of Very High Concern Candidate list. The green roll ingredients are inventoried to at least 0.01% by weight (100ppm) and certified DECLARE LBC Red List Free which means no harmful chemical substance, see annex 2.	<b>1 point</b> 

<sup>1</sup> <https://www.knaufinsulation.com/downloads/environmental-product-declaration-epd/urbanscape>  
<https://ibu-epd.com/>

**LEED version 4.1**  
**Product Data for Building Certification**  
**URBANSCAPE GREEN ROOF SYSTEMS**


LEED Credit Category code	LEEDv4 Definition	Knauf Insulation Products contribution	Contributes towards
<b>Indoor Environmental Quality (EQ)</b> Acoustic Performance 	To provide workspaces and classrooms that promote occupants' well-being, productivity, and communications through effective acoustic design	Noise attenuation originating for example from outdoor sounds or rainfall/hail on the roofs. It keeps the living space quieter and more comfortable. See annex 3: Airborne Sound Insulation for Urbanscape Green Roof Systems.	<b>1 point</b>
<b>Indoor Environmental Quality (EQ)</b> Thermal Comfort 	To promote occupants productivity, comfort, and well-being by providing quality thermal comfort.	Green roof is a design alternative for thermal comfort strategy. Due to green roof's cooling effect, and limiting sun radiation transfer through the roof there will be less heat radiation from the ceiling and air-conditioning will be minimized which will have positive comfortability feel and increased productivity for workers as well as more comfortable feel for the customer. See annexe 1: Urbanscape Green Roof Performance Evaluation Tool.	<b>1 point</b>

# LEED version 4.1

## Product Data for Building Certification

### URBANSCAPE GREEN ROOF SYSTEMS


**Annex 1: Urbanscape Green Roof Performance Evaluation Tool.**

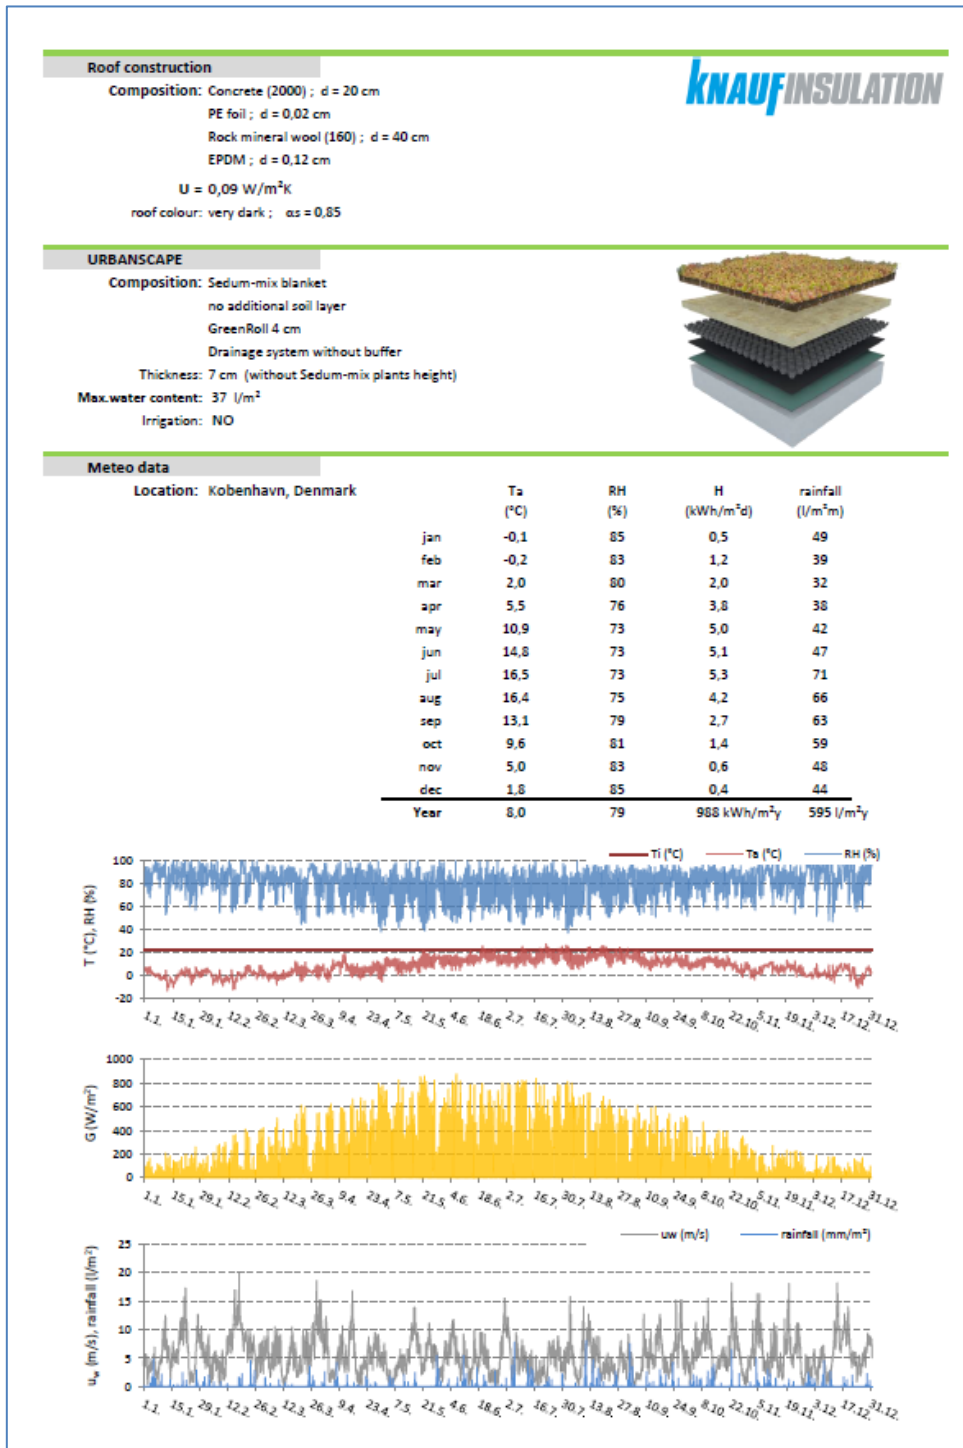

# LEED version 4.1

## Product Data for Building Certification


### URBANSCAPE GREEN ROOF SYSTEMS

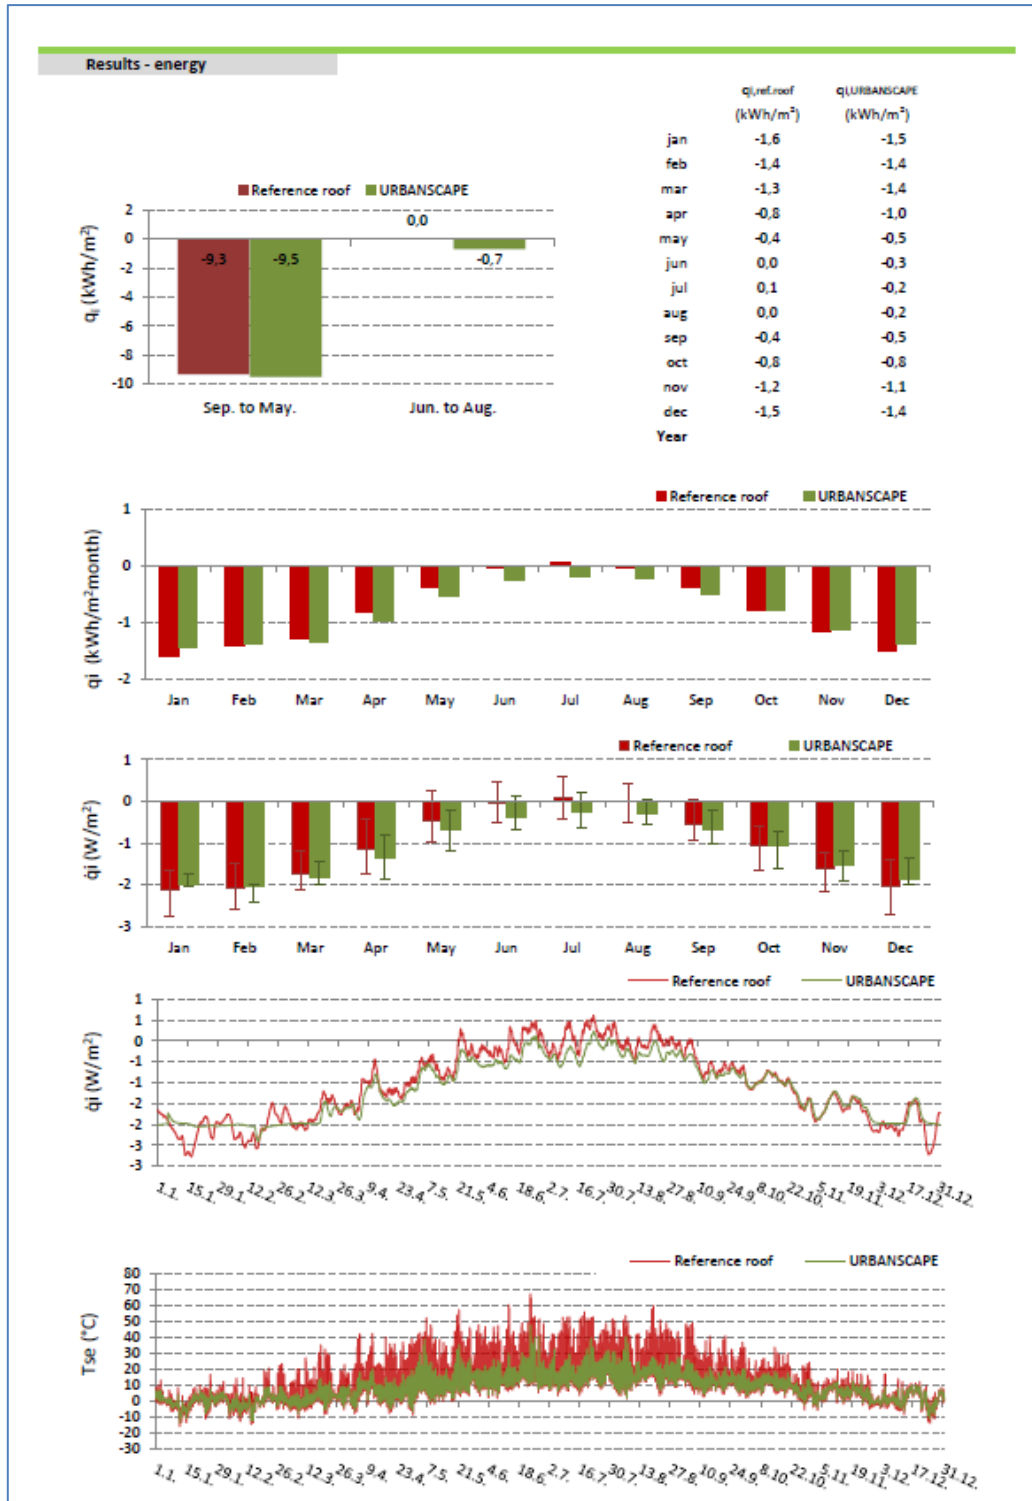

# LEED version 4.1

## Product Data for Building Certification

### URBANSCAPE GREEN ROOF SYSTEMS

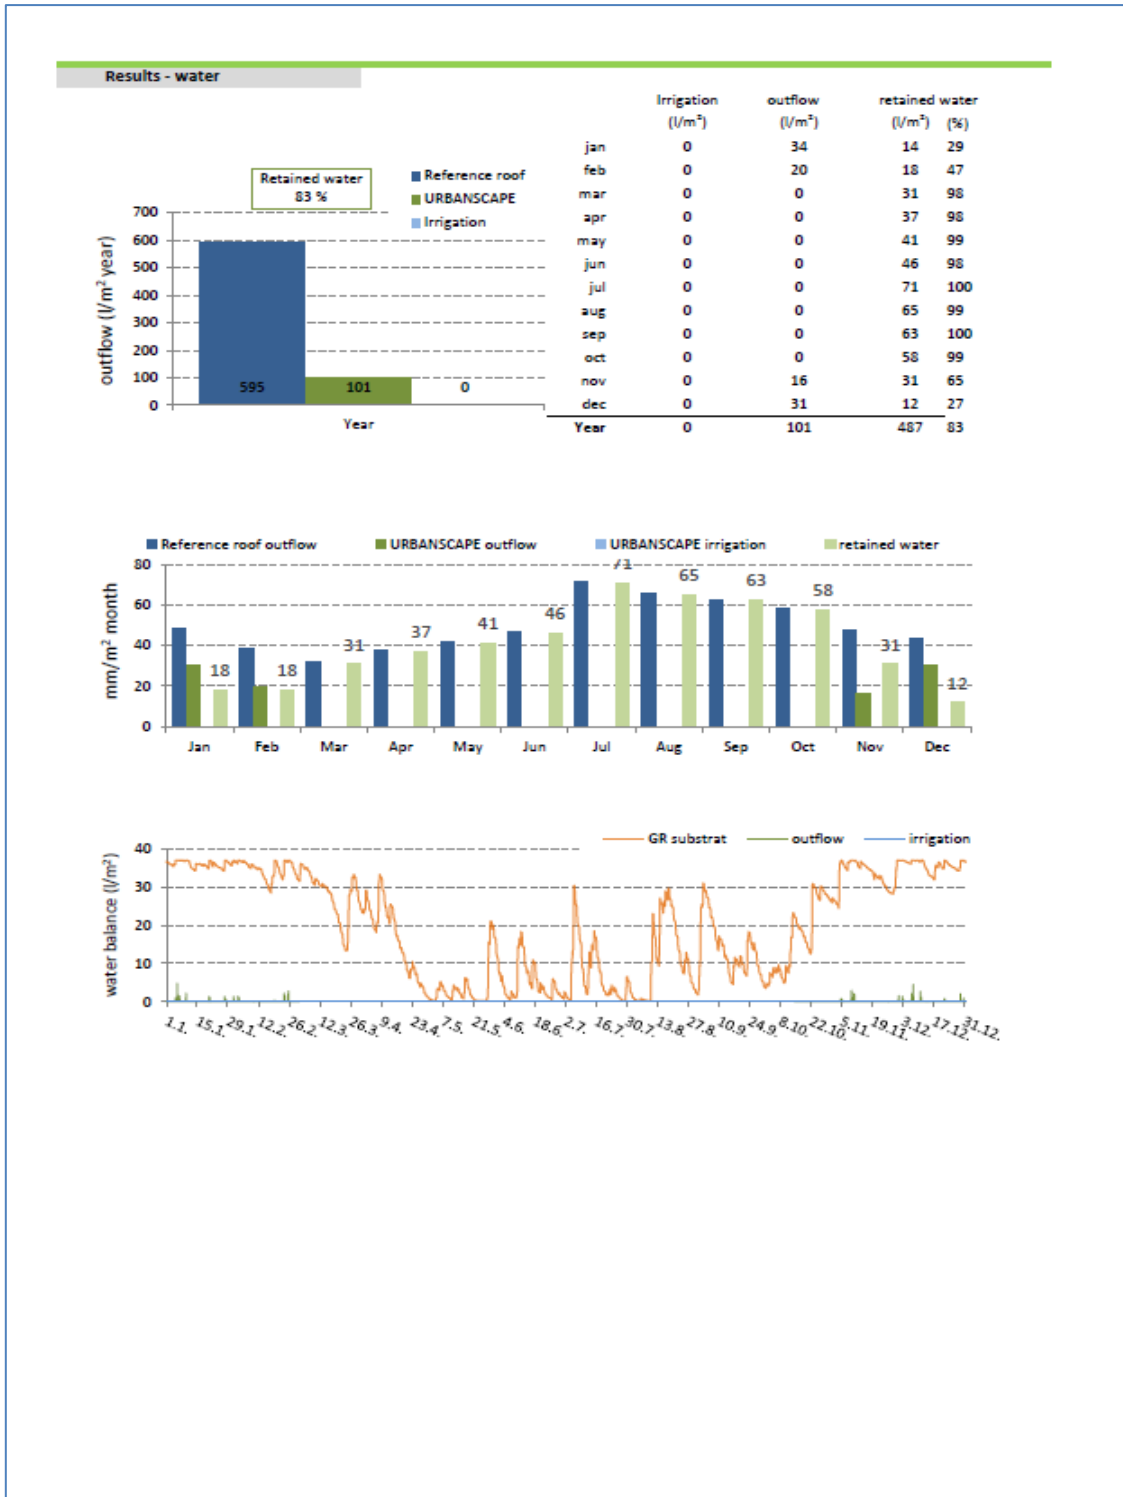


# LEED version 4.1

## Product Data for Building Certification

### URBANSCAPE GREEN ROOF SYSTEMS

#### Annex 2: REACH compliance letter and DECLARE label



**Subject : Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH); Regulation (EC) No 1907/2006.**

Dear Customer

Thank you for your enquiry with regard with regard to the following products: –

- Urbanscape HTC Green Roll.

Knauf Insulation has registered Mineral Wool Insulation; manufactured or imported by the following legal entities and used in the manufacture of the products listed above, under the Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH); Regulation (EC) No 1907/2006.

- Knauf Insulation D.O.O – Skofja Loka, Slovenia


The registered fibres meet the following definition:-

- **EC number:** 926-099-9
- **Definition:** Man made vitreous (silicate) fibres with random orientation with alkaline and alkali earth oxides (Na<sub>2</sub>O+K<sub>2</sub>O+CaO+MgO+BaO) content greater than 18% by weight and fulfilling one of the nota Q conditions.
- **Public name:** MMVF note Q fibre
- **Classification:** Not classified (manmade vitreous (silicate) fibre with and index number of 650-016-00-2 fulfilling one of the note Q conditions in the Classification, labelling, packaging regulations (CLP) (EC) No 1272/2008, as amended in regulation (EC) No 790/2009 and thus exempted from classification.

The registration is confirmed by the receipt of registration numbers for each of the listed legal entities by The European Chemical Agency (ECHA). The registration numbers are included on the relevant company product safety data sheets.

Knauf Insulation mineral wool products do not contain any substance of high concern (SVHC) in concentration above 0.1% w/w, Asbestos or Crystalline silica. Furthermore Knauf insulation mineral wool products do not contain any substances listed in the Annex XVII of the REACH regulation.

If you have any questions please do not hesitate to contact us; details below




Bruno BLIKI  
Product Regulatory Affairs Manager  
Knauf Insulation  
SDS@knaufinsulation.com


URBANSCAPE HTC GREEN ROLL REACH DECLARATION – OCTOBER 2015 1

## LEED version 4.1

### Product Data for Building Certification

## URBANSCAPE GREEN ROOF SYSTEMS

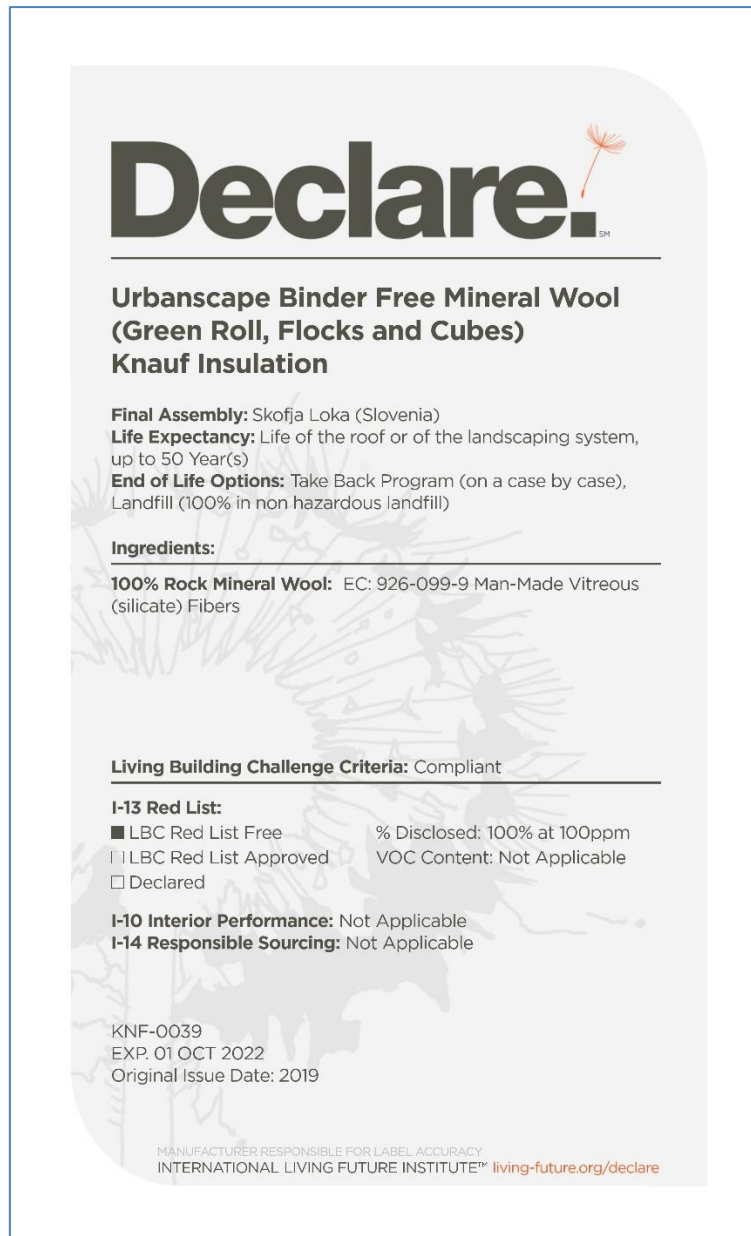

**Declare.** 

---

**Urbanscape Binder Free Mineral Wool  
(Green Roll, Flocks and Cubes)  
Knauf Insulation**

**Final Assembly:** Skofja Loka (Slovenia)  
**Life Expectancy:** Life of the roof or of the landscaping system,  
up to 50 Year(s)  
**End of Life Options:** Take Back Program (on a case by case),  
Landfill (100% in non hazardous landfill)

**Ingredients:**

---

**100% Rock Mineral Wool:** EC: 926-099-9 Man-Made Vitreous  
(silicate) Fibers

**Living Building Challenge Criteria:** Compliant

---

**I-13 Red List:**

<input checked="" type="checkbox"/> LBC Red List Free	% Disclosed: 100% at 100ppm
<input type="checkbox"/> LBC Red List Approved	VOC Content: Not Applicable
<input type="checkbox"/> Declared	

**I-10 Interior Performance:** Not Applicable  
**I-14 Responsible Sourcing:** Not Applicable

KNF-0039  
EXP. 01 OCT 2022  
Original Issue Date: 2019

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY  
INTERNATIONAL LIVING FUTURE INSTITUTE™ [living-future.org/declare](http://living-future.org/declare)



# LEED version 4.1

## Product Data for Building Certification

### URBANSCAPE GREEN ROOF SYSTEMS

#### Annexe 3: Airborne sound insulation for Urbanscape Green Roof Systems

#### Evidence of Performance Airborne sound insulation of flat roofs


**Test Report**  
No. 15-002251-PR01  
(PB X01-F01-04-en-01)



Client	<b>Knauf Insulation, D.O.O.</b> Trata 32 4220 Skofja Loka Slovenia
Product	Flat roof as green roof
Designation	Urbanscape Green Roof
Cover	20 – 40 mm Vegetation mat, $m' = 23.0 \text{ kg/m}^2$ 40 mm Green roof substrate of mineral wool fibre, $m' = 4.9 \text{ kg/m}^2$
Insulation	12.5 mm Drainage system, $m' = 0.72 \text{ kg/m}^2$
2 <sup>nd</sup> separation layer	0.5 mm LD PE- film, $m' = 0.5 \text{ kg/m}^2$
1 <sup>st</sup> separation layer	2.5 mm EPDM, $m' = 3.4 \text{ kg/m}^2$
Vapour barrier	160 mm Reinforced concrete floor, $m' = 400 \text{ kg/m}^2$
Supporting construction	
Overall dimensions	5,000 mm × 5,270 mm
Total thickness	236 – 256 mm
Area related mass	432.5 kg/m <sup>2</sup>
Result	Weighted sound reduction index $R_w$ Spectrum adaptation terms C and $C_{tr}$

**Basis**  
EN ISO 10140-1: 2010  
+A1: 2012 + A2:2014  
EN ISO 10140-2: 2010  
EN ISO 717-1: 2013  
15-002251-PR01 (PB X01-F01-04-en-01) dated 16<sup>th</sup> of October 2015

**Representation**



**Instructions for use**

This test report serves to demonstrate the sound insulation of a flat roof. As set out by the German Bauregelliste (Construction Products List), evidence of compliance in Germany is possible only in the form of an AbP (national technical test certificate). This test report cannot be used as a substest to be included in a national technical test certificate (AbP).

**Validity**

The data and results given relate solely to the tested and described specimen. Testing the sound insulation does not allow any statement to be made on further characteristics of the present construction regarding performance and quality.

**Notes on publication**

The ift Guidance Sheet "Conditions and Guidance for the Use of ift Test Documents" applies. The cover sheet can be used as abstract.

**Contents**

The test report contains a total of 9 pages  
1 Object  
2 Procedure  
3 Detailed results  
4 Instructions for use  
Data sheet (1 page)



$$R_w (C; C_{tr}) = 57 (-3; -8) \text{ dB}$$

ift Rosenheim  
16.10.2015

*J. Kemiger*  
Dr. Joachim Hessinger, Dipl.-Phys.  
Head of Testing Department  
Building Acoustics

*S. Bacher*  
Stefan Bacher, Dipl.-Ing. (FH)  
Operating Testing Officer  
Building Acoustics

# LEED version 4.1

## Product Data for Building Certification

### URBANSCAPE GREEN ROOF SYSTEMS

#### Evidence of Performance

Airborne sound insulation of flat roofs


**Test Report**  
**No. 15-002251-PR01**  
 (PB X03-F01-04-en-01)



Client	<b>Knauf Insulation, D.O.O.</b> Trata 32 4220 Skofja Loka Slovenia
Product	Flat roof as green roof
Designation	Urbanscape Green Roof
Cover	20 – 40 mm Vegetation mat, m' = 23.0 kg/m <sup>2</sup> 20 mm Green roof substrate of mineral wool fibre, m' = 2,3 kg/m <sup>2</sup>
Insulation	
2 <sup>nd</sup> separation layer	12.5 mm Drainage system, m' = 0.72 kg/m <sup>2</sup>
1 <sup>st</sup> separation layer	0.5 mm LD PE-film, m' = 0.5 kg/m <sup>2</sup>
Vapour barrier	2.5 mm EPDM, m' = 3,4 kg/m <sup>2</sup>
Supporting construction	160 mm Reinforced concrete floor, m' = 400 kg/m <sup>2</sup>
Overall dimensions	5,000 mm × 5,270 mm
Total thickness	216 – 236 mm
Area related mass	429,9 kg/m <sup>2</sup>
Result	Weighted sound reduction index $R_w$ Spectrum adaptation terms C and $C_{tr}$

**Basis**  
 EN ISO 10140-1: 2010  
 +A1: 2012 + A2:2014  
 EN ISO 10140-2 : 2010  
 EN ISO 717-1 : 2013  
 15-002251-PR01 (PB X03-F01-de-01) dated 16<sup>th</sup> of October 2015

**Representation**



**Instructions for use**

This test report serves to demonstrate the sound insulation of a flat roof. As set out by the German Bauregelleiste (Construction Products List), evidence of compliance in Germany is possible only in the form of an AbP (national technical test certificate). This test report cannot be used as a substitute to be included in a national technical test certificate (AbP).

**Validity**

The data and results given relate solely to the tested and described specimen. Testing the sound insulation does not allow any statement to be made on further characteristics of the present construction regarding performance and quality.

**Notes on publication**

The ift Guidance Sheet "Conditions and Guidance for the Use of ift Test Documents" applies. The cover sheet can be used as abstract.

**Contents**

- The test report contains a total of 9 pages
- 1 Object
  - 2 Procedure
  - 3 Detailed results
  - 4 Instructions for use
- Data sheet (1 page)



$$R_w (C; C_{tr}) = 55 (-3; -7) \text{ dB}$$

ift Rosenheim  
 16.10.2015

*J. Hessinger*

Dr. Joachim Hessinger, Dipl.-Phys.  
 Head of Testing Department  
 Building Acoustics

*S. Bacher*

Stefan Bacher, Dipl.-Ing. (FH)  
 Operating Testing Officer  
 Building Acoustics

Ver-Pis-1324-06 / 01.12.2014

ift Rosenheim GmbH  
 Theodor-Giell-Str. 7-9  
 D-83028 Rosenheim

Kontakt  
 Tel +49 8031 201-0  
 Fax +49 8031 281-290  
 www.ift-rosenheim.de

Prüfung und Kalibrierung – EN ISO/IEC 17025  
 Inspektion – EN ISO/IEC 17020  
 Zertifizierung Produkte – EN ISO/IEC 17065  
 Zertifizierung Managementsysteme – EN ISO/IEC 17021

