

# ENVIRONMENTAL PRODUCT DECLARATION

In accordance with ISO 14025 and EN 15804+A1 for:

## Thermo-teK PS Eco

From

**KNAUF**INSULATION



|                          |   |
|--------------------------|---|
| Program:                 | The International EPD® System<br><a href="http://www.environdec.com">www.environdec.com</a> |
| Programme operator:      | EPD International AB  |
| EPD registration number: | S-P-01585   |
| ECO EPD reference number | 00000929  |
| Publication date:        | 2019-05-20  |
| Validity date:           | 2024-05-20  |



## Programme-related information and verification

The EPD owner has the sole ownership, liability, and responsibility for the EPD. EPDs of construction products may not be comparable if they do not comply with EN 15804+A1 and if the building context, respectively the product-specific characteristics of performance are not taken into account.

|  |  |
|--|--|
| <b>Programme:</b>                      | The International EPD® System<br>EPD International AB<br>Box 210 60<br>SE-100 31 Stockholm<br>Sweden<br><a href="http://www.environdec.com">www.environdec.com</a><br><a href="mailto:info@environdec.com">info@environdec.com</a> |
| <b>EPD registration number:</b>        | S-P-01585  |
| <b>Published:</b>                      | 2019-05-20   |
| <b>Valid until:</b>                    | 2024-05-20   |
| <b>EPD owner</b>                       | Knauf Insulation Sprl<br>Rue de Maestricht 95<br>4600 Visé<br>Belgium  |
| <b>Product Category Rules:</b>         | PCR 2012:01. Construction products and construction services. Version 2.3<br>Sub-PCR-I Thermal insulation products (EN 16783).<br>Version 2018-11-22   |
| <b>Product group classification:</b>   | UN CPC 37  |
| <b>Reference year for data:</b>        | 2016   |
| <b>Geographical application scope:</b> | Europe   |

|   |
|---|
| CEN standard EN 15804+A1 serves as the Core Product Category Rules (PCR)  |
| Product category rules (PCR): Construction products and Construction services, 2012:01, version 2.3, UN CPC 37. Sub-PCR-I Thermal insulation products (EN 16783), version 2018-11-22,                     |
| PCR review was conducted by: The technical Committee of the International EPD@ System   |
| Independent third-party verification of the declaration and data, according to ISO 14025:2006:<br><input checked="" type="checkbox"/> EPD process certification <input type="checkbox"/> EPD verification |
| Accredited by: Bureau Veritas certification Sverige AB SE006629-1   |
| Procedure for follow-up of data during EPD validity involves third party verifier:<br><input checked="" type="checkbox"/> Yes <input type="checkbox"/> No   |

## General information

### Information about the company

#### Description of the organisation:

Knauf Insulation has more than 40 years of experience in the insulation industry and is one of the most respected names in insulation worldwide. Knauf Insulation is manufacturing products and solutions mainly in glass and rock mineral wool. We operate more than 37 manufacturing sites globally in 15 countries and employ more than 5,000 people. The Headquarters are located in Belgium, in Visé.

#### Product-related or management system-related certifications:

All Knauf Insulation sites, including the related site for this EPD, are ISO 9001, ISO 14001, ISO 5001 and OHSAS 18001 certified under the scope "Design, Development and Production of Insulation Materials and Systems".

#### Name and location of production site:


The application in construction of the concerned product is mainly European. The data utilized for the production stage life cycle assessment are related to a production plant located in Novi Marof in Croatia.

Knauf Insulation d.o.o., Varaždinska 140, HR - 42220 Novi Marof, Croatia

### Information about Rock Mineral Wool production

The Rock Mineral Wool Products for Technical Solutions are available in the form of pipe sections, lamellas, mats, slabs or boards, rolls and loose wool. The density for rock mineral wool products ranges from 20 to 200 kg/m<sup>3</sup>. In terms of composition, the inorganic part (92-98%) is composed of volcanic rocks, typically basalt, and some dolomite and with an increasing proportion of recycled material in the form of briquettes, a mix of stone wool scrap, other secondary materials and cement.

The remaining fraction is the bio-organic binder named ECOSE®. The main constituent of the binder is dextrose extracted from plants.

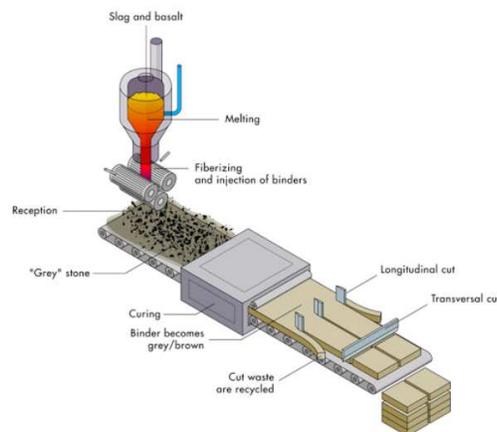

## Product information

**Product name:** Thermo-teK PS Eco

**Product identification:** The declared insulation product is Thermo-teK PS Eco, a rock mineral wool faced with aluminium foil of 1 square meter (considered for this EPD). It needs a Declaration of Performance taken into consideration the harmonized product standard EN 14303 and the CE mark.

**Product description:** The main application for Thermo-teK PS Eco is thermal insulation of residential and commercial buildings pipes in very high temperature environments. Thermo-teK PS Eco is used in Heating, Ventilation, Air Conditioning and plumbing installations.

**UN CPC code:**

37990: Non-metallic mineral products (including mineral wool, expanded mineral materials, worked mica, articles of mica, non-

electrical articles of graphite or other carbon and articles of peat).

**Geographical scope:**

The product is produced in Novi Marov in Croatia with Croatian energy mix for electricity. Regarding the market area, the product is mainly marketed in Europe.

**Technical Characteristics:**

| Parameter                                   | Value                   |
|---|-------------------------|
| Thermal conductivity/ EN ISO 8497           | 0.033 W/(mK) at 10°C    |
| Water vapor diffusion resistance (EN 14303) | 1                       |
| Reaction to fire (EN 13501-1)               | A1 (EN 1350-1)          |
| Declared density range/ EN 13470            | 81-99 kg/m <sup>3</sup> |
| Melting point of fibers DIN 4102-17         | ≥ 1000°C                |

## LCA information

**Functional unit / declared unit:**

The declared unit is 1 meter long of Rock Mineral Wool unfaced Pipe Section Thermo-teK PS Eco with an inner diameter of 35 mm and an outside diameter of 65 mm (thickness 30 mm). The declared lambda is 0.033 W/mK at 10°C. The density used for the calculation of this specific LCA is 90 kg/m<sup>3</sup>.

**Reference service life:** The RSL or durability of Thermo-teK PS Eco is as long as the lifetime of the building equipment in which it is used (at least 50 years).


**Time representativeness:**

Plant production data for the complete year 2016.

**Database(s) and LCA software used:**

The LCA model, the data aggregation and environmental impacts are calculated with the software GaBi 8.7 and its Service Pack 36 databases. Since hardly any datasets are available for Croatia, background data for Europe and/or Germany are used as much as possible.

**System diagram:**

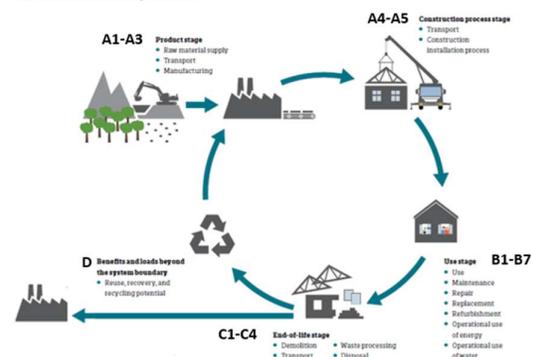

## Description of system boundaries:

The system boundary of the EPD follows the modularity approach defined by the /EN 15804+A1/. **The type of EPD is cradle to grave.**

List and explanation of the modules declared in the EPD.

**The product stage (A1-A3) includes:**

- A1 - raw material extraction and processing, processing of secondary material input (e.g. recycling processes),
- A2 - transport to the manufacturer and
- A3 - manufacturing.

This includes provision of all materials, products and energy, packaging processing and its transport, as well as waste processing up to the end-of-waste state or disposal of final residues during the product stage.

The LCA results are given in an aggregated form for the product stage, meaning that the modules A1, A2 and A3 are considered as a unique module A1-A3.

| Product Parameters                               | Value                                      |
|--|--|
| Declared Density                                 | 90 kg/m <sup>3</sup>                       |
| Rock mineral wool weight (without facing weight) | 0.885 kg                                   |
| Length   | 1 meter                                    |
| Thickness  | 30 mm (radius in 35 mm – radius out 65 mm) |
| Volume   | 0.008482 m <sup>3</sup>                    |
| Facing   | None                                       |
| Packging Plastic sheet                           | 0.0083 kg                                  |
| Packaging Wooden pallet                          | 0.1573 kg                                  |
| Packaging Cardboard boxes                        | 0.1888 kg                                  |

**The construction process stage includes:**

- A4 - transport to the construction site and
- A5 - installation into the building.

The transport to the building site (A4) and installation (A5) included in this LCA use the following parameters:

| Parameter   | Value  |
|---|--|
| Average transport distance  | 1100 km  |
| Type of fuel and vehicle consumption or type of vehicle used for transport. | Truck. Euro 6. 28 – 32 t / 22 t payload. 33 L for 100 km (if 100% capacity utilization). |
| Truck capacity utilization (including 30% of empty returns)                 | 30 % of the weight capacity  |
| Loss of materials in site   | 2%   |
| Packaging Wooden pallet   | 100% incinerated   |
| Packaging Plastic sheet   | 40% recycled, 60% incinerated  |
| Packaging Cardboard boxes   | 80% recycled, 20% incinerated  |

The treatment of the packaging waste after the installation of the product (A5) has been considered.

**The Use stage (B1-B7) includes:**

- B1: Use
- B2: Maintenance
- B3: Repair
- B4: Replacement
- B5: Refurbishment
- B6: Operational Energy Use
- B7: Operational Water Use

Once installation is complete, no actions or technical operations are required during the use stages till the end of life. Therefore, the mineral wool has no impacts (excluding potential energy savings) on this stage.

**The end-of-life stage includes:**

- C1 - de-construction, demolition,
- C2 - transport to waste processing,
- C3 - waste processing for reuse, recovery and/or recycling and
- C4 - disposal.

This includes provision of all transports, materials, products and related energy and water use. The common manual dismantling impact of insulation is considered as very small and can be neglected in C1.

Although Rock Mineral Wool products from Knauf Insulation are partly recycled at their end-of-life, an established collection system does not exist yet. Therefore, the assumption chosen

in this study, 100% landfill (C4) after the use phase, is the most conservative approach.

| Parameter   | Value  |
|---|--|
| Disposal type (mineral wool)  | 100% landfill  |
| Average transport distance waste (C2)                                       | 50 km  |
| Type of fuel and vehicle consumption or type of vehicle used for transport. | Truck-trailer, Euro 3, 34 - 40t gross weight / 27t payload capacity/ 40 L for 100 km (if 100 % utilization). |
| Truck capacity utilization  | 50 % of the weight capacity  |

**Module D** includes reuse, recovery and/or recycling potentials. According to /EN 15804+A1/, any declared benefits and loads from net flows leaving the product system not allocated as co-products and having passed the end-of waste state shall be included in module D. Benefits considered in module D originate from packaging recycling or incineration.

#### Content Declaration

The product does not contain substances from the "Candidate List of Substances of Very High Concern for Authorisation" under the REACH regulation (above 0.1% weight/weight).

#### Recycled material

The mineral wool waste that is originating from the manufacturing process is recycled internally through the use of briquettes (mineral

wool waste and additional cement) that are reinjected into the batch. For 2016 year, no external waste is considered into this specific LCA.

#### Additional information:

All raw materials for the manufacturing of the declared product, the required energy, water consumption and the resulting emissions are considered into the LCA. Consecutively, the recipe components with a share even less than 1% are included. All neglected processes contribute less than 5% to the total mass or less than 5% to the total energy consumption. For information, the impact of the Rock Mineral Wool plant construction or machines, are not taken into account in the life cycle assessment. Allocation criteria if any are based on mass.

#### More information:

[www.knaufinsulation.com](http://www.knaufinsulation.com)

[www.ki4ts.com](http://www.ki4ts.com)

#### Name and contact information of LCA practitioner:

Jean-Pierre Pigeolet  
 Knauf Insulation Sprl  
 Rue de Maestricht 95  
 4600 Visé  
 Belgium  
 Contact: Jean-Pierre.Pigeolet@knaufinsulation.com

## Environmental performance

**Potential environmental impacts** : 1 meter long of Rock Mineral Wool unfaced Pipe Section Thermo-teK PS Eco (thickness 30 mm).

| PARAMETERS   | UNIT                                 | TOTAL A1-A3 | A4        | A5        | TOTAL B1-B7 | C1 | C2        | C3 | C4        | D          |
|--|--------------------------------------|-------------|-----------|-----------|-------------|----|-----------|----|-----------|------------|
| Global warming potential (GWP)                             | kg CO <sub>2</sub> eq.               | 0.752       | 0.172     | 0.214     | 0           | 0  | 0.00292   | 0  | 0.0135    | 0.0655     |
| Depletion potential of the stratospheric ozone layer (ODP) | kg CFC 11 eq.                        | 2.26E-011   | 4.65E-015 | 1.41E-011 | 0           | 0  | 8.07E-017 | 0  | 3.06E-015 | -1.61E-011 |
| Acidification potential (AP)                               | kg SO <sub>2</sub> eq.               | 0.0202      | 0.000339  | 0.000512  | 0           | 0  | 1.26E-005 | 0  | 7.99E-005 | -0.000447  |
| Eutrophication potential (EP)                              | kg PO <sub>4</sub> <sup>3-</sup> eq. | 0.00409     | 8.55E-005 | 0.000118  | 0           | 0  | 3.19E-006 | 0  | 1.1E-005  | -0.000108  |
| Formation potential of tropospheric ozone (POCP)           | kg C <sub>2</sub> H <sub>4</sub> eq. | 0.00024     | 3.7E-005  | 9.93E-006 | 0           | 0  | 1.14E-006 | 0  | 6.21E-006 | -5.34E-005 |
| Abiotic depletion potential – Elements (ADPe)              | kg Sb eq.                            | 6.94E-007   | 1.4E-008  | 4.46E-008 | 0           | 0  | 2.42E-010 | 0  | 5.18E-009 | -1.35E-007 |
| Abiotic depletion potential – Fossil resources (ADPf)      | MJ, net calorific value              | 13.5        | 2.32      | 1.2       | 0           | 0  | 0.0402    | 0  | 0.175     | -2.55      |

**Use of resources** : 1 meter long of Rock Mineral Wool unfaced Pipe Section Thermo-teK PS Eco (thickness 30 mm).

| PARAMETER                                |                         | UNIT                    | TOTAL A1-A3 | A4        | A5   | TOTAL B1-B7 | C1        | C2      | C3        | C4         | D     |
|--|-------------------------|-------------------------|-------------|-----------|------|-------------|-----------|---------|-----------|------------|-------|
| Primary energy resources – Renewable     | Use as energy carrier   | MJ, net calorific value | 7.82        | 0.128     | 2.18 | 0           | 0         | 0.00222 | 0         | 0.0224     | -5.23 |
|  | Used as raw materials   | MJ, net calorific value | 4.45        | 0         | 0    | 0           | 0         | 0       | 0         | 0          | 0     |
|  | TOTAL                   | MJ, net calorific value | 12.3        | 0.128     | 2.18 | 0           | 0         | 0.00222 | 0         | 0.0224     | -5.23 |
| Primary energy resources – Non-renewable | Use as energy carrier   | MJ, net calorific value | 15          | 2.32      | 1.31 | 0           | 0         | 0.0403  | 0         | 0.181      | -3.02 |
|  | Used as raw materials   | MJ, net calorific value | 0.27        | 0         | 0    | 0           | 0         | -0      | 0         | 0          | 0     |
|  | TOTAL                   | MJ, net calorific value | 15.2        | 2.32      | 1.31 | 0           | 0         | 0.0403  | 0         | 0.181      | -3.02 |
| Secondary material                       | kg                      | 0                       | 0           | 0         | 0    | 0           | 0         | 0       | 0         | 0          | 0     |
| Renewable secondary fuels                | MJ, net calorific value | 1.57E-018               | 1.26E-029   | 1.5E-008  | 0    | 0           | 2.18E-031 | 0       | 2.75E-024 | -4.19E-026 |       |
| Non-renewable secondary fuels            | MJ, net calorific value | 1.85E-017               | 1.9E-028    | 1.76E-007 | 0    | 0           | 3.3E-030  | 0       | 3.22E-023 | -4.92E-025 |       |
| Net use of fresh water                   | m3                      | 0.00468                 | 0.000236    | 0.00171   | 0    | 0           | 4.1E-006  | 0       | 3.46E-005 | -0.00105   |       |

**Waste production and output flows** : 1 meter long of Rock Mineral Wool unfaced Pipe Section Thermo-teK PS Eco (thickness 30 mm).

**Waste production**

| PARAMETER                    | UNIT | TOTAL A1-A3 | A4        | A5        | TOTAL B1-B7 | C1 | C2        | C3 | C4        | D         |
|------------------------------|------|-------------|-----------|-----------|-------------|----|-----------|----|-----------|-----------|
| Hazardous waste disposed     | kg   | 2.96E-007   | 1.34E-007 | 3.79E-008 | 0           | 0  | 2.33E-009 | 0  | 3.12E-009 | -1.8E-007 |
| Non-hazardous waste disposed | kg   | 0.0813      | 0.000195  | 0.0227    | 0           | 0  | 3.38E-006 | 0  | 0.85      | -0.00286  |
| Radioactive waste disposed   | kg   | 0.000694    | 3.18E-006 | 3.9E-005  | 0           | 0  | 5.52E-008 | 0  | 2.62E-006 | -0.000185 |

## Output flows

| PARAMETER                     | UNIT | TOTAL A1-A3 | A4 | A5     | TOTAL B1-B7 | C1 | C2 | C3 | C4 | D     |
|-------------------------------|------|-------------|----|--------|-------------|----|----|----|----|-------|
| Components for reuse          | kg   | 0           | 0  | 0      | 0           | 0  | 0  | 0  | 0  | 0     |
| Material for recycling        | kg   | 0           | 0  | 0      | 0           | 0  | 0  | 0  | 0  | 0     |
| Materials for energy recovery | kg   | 0           | 0  | 0      | 0           | 0  | 0  | 0  | 0  | 0     |
| Exported energy, electricity  | MJ   | 0           | 0  | 0.0912 | 0           | 0  | 0  | 0  | 0  | 0.349 |
| Exported energy, thermal      | MJ   | 0           | 0  | 0.199  | 0           | 0  | 0  | 0  | 0  | 0.627 |

## LCA interpretation

### ENVIRONMENTAL IMPACTS

All impact categories, except the Abiotic Depletion Potential Element and the Ozone Depletion Potential, are dominated by the production processes. This can be explained by the huge impact of the energy use (electricity, natural gas and coke) for Rock Mineral Wool production.

**The Global Warming Potential (GWP)** is clearly dominated by the production processes impact (70%). Mostly due to the CO<sub>2</sub> emissions by the cupola furnace and the energy consumption at different levels. The coke is unfortunately generating quite a lot of CO<sub>2</sub> during the melting process. CO<sub>2</sub> is also generated upstream during the electricity production. However, the bio-based binder allows some sequestration of CO<sub>2</sub> thanks to CO<sub>2</sub> capture during plants growth. The transport to construction site has an impact of less than 10%.

**The Ozone layer Depletion Potential (ODP)** is mostly influenced by construction site installation by considering plastic packaging incineration with energy valorisation and besides also cardboard production.

**The Acidification Potential (AP)** is dominated by the production due to the emissions related to the raw materials melting process for example sulphur dioxides emissions and the energy consumption.

**The Eutrophication Potential (EP)** is mostly due to the production, especially due to the ammonia emission during binder application into the plant.

**The Photochemical Ozone Creation Potential (POCP)** is dominated by the production (emissions in the cupola furnace and energy consumption). The main emissions contributing to this impact category are sulphur dioxide and nitrogen oxides.

**The Abiotic Depletion Potential Element (ADPe)** impact is mainly due here indirectly by the packaging with the cardboard production and some impacts from the binder. The impact of the raw materials, like the volcanic rock basalt, is really minor as this material is very abundant on Earth.

**The Abiotic Depletion Potential Fossil (ADPf)** is dominated by the use of coke as energy carrier. Next to the coke, we have also the impact of natural gas and upstream the electricity energy mix.

### RESOURCES USE

The main impact on **Primary Energy Demand from Non-Renewable** resources is from the production process of rock mineral wool products, especially due to the energy carrier, the coke, and the global energy consumption (gas and electricity).

The **Primary Energy Demand from Renewable** resources is dominated by the bio-based binder and the packaging, especially the wood pallets and, in less extent the cardboard.

For the **Use of Secondary Material**, there is no secondary materials taken into account, as the internal recycling cannot be considered.

## References

### **International EPD® System**

General Programme Instructions of the International EPD® System. Version 3.0.  
Product Category Rules PCR 2012:01. Construction products and construction services. Version 2.3  
Sub-PCR-I Thermal insulation products (EN 16783). Version 2018-11-22

### **ISO 14025**

DIN EN ISO 14025:2011-10: Environmental labels and declarations — Type III environmental declarations — Principles and procedures

### **EN 15804**

EN 15804:2012-04+A1 2013: Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products

### **GaBi 8.7**

GaBi 8.7: Software and database for life cycle engineering. LBP, University of Stuttgart and PE INTERNATIONAL AG, 2018.

### **EN 14303**

EN 14303:2009+A1: 2013: Thermal insulation products for building equipment and industrial installations.  
Factory made mineral wool products.

### **EN 13470**

EN 13470: 2001 Thermal insulating products for building equipment and industrial installations - Determination of the apparent density of preformed pipe insulation.

### **ISO 8497**

ISO 8497:1994 Thermal insulation -- Determination of steady-state thermal transmission properties of thermal insulation for circular pipes.

### **EN 13501-1**

EN 13501-1: 2009 Fire classification of construction products and building elements - Part 1: Classification using test data from reaction to fire tests.

### **DIN 4102 / T17**

DIN 4102 / T17: 1990 Fire behaviour of building materials and elements; determination of melting point of mineral fibre insulating materials; concepts, requirements and testing.

## Contact information:

|                            |  |
|----------------------------|--|
| <p>EPD owner:</p>          |  <p>Knauf Insulation<br/>Rue de Maestricht 95<br/>4600 Visé<br/>Belgium<br/><a href="http://www.knaufinsulation.com">www.knaufinsulation.com</a><br/>Contact: <a href="mailto:jean-pierre.pigeolet@knaufinsulation.com">jean-pierre.pigeolet@knaufinsulation.com</a></p>  |
| <p>LCA support:</p>        |  <p>Université de Liège – Laboratory of Chemical Engineering<br/>PEPs - Products, Environment and Processes<br/>Allée du 6 août 15, Bat B6<br/>4000 Liège<br/>Belgium</p>  <p>Thinkstep<br/>Hauptstraße 111-113<br/>70771 Leinfelden-Echterdingen<br/>Germany</p> |
| <p>Programme operator:</p> |  <p>EPD International AB<br/><a href="mailto:info@environdec.com">info@environdec.com</a></p>   |