

HERAKLITH® DDS PLUS CONCRETE SCREW

January 2023



DESCRIPTION

Heraklith® DDS Plus Concrete Screws are suited for securing wood wool panels directly into pre-cast concrete. They have a patented wood wool texture on the head of the screw, designed to provide a neat decorative finish once installed.

SPECIFICATIONS


ART.NO. NATURE TONE	ART.NO. WHITE	SCREW LENGTH (mm)	PANEL THICKNESS TO (mm)	UNITS/PACK
416812	416798	75	50	100
416820	416809	250	225	100

BENEFITS

- ✓ Made of corrosion-resistant steel, the screws provide a fire-resistant solution for concrete soffits when combined with Heraklith® products.
- ✓ Simple installation: pre-drill and screw in
- ✓ Minimal anchorage depth for easy fixing
- ✓ Plastic screw head with wood wool texture for decorative finish
- ✓ Available in any RAL colour upon request to match panel colour

TECHNICAL INFORMATION

Corrosion category	C3
Tensile strength concrete C20/25	0.5kN
Screw diameter	7.3mm
Head diameter	26mm
Drilled hole diameter	6mm
Drilled hole depth	30mm
Anchoring depth in concrete	25mm
Screw drive	Torx T30
Recommended anchoring material	Concrete (2000-2600 kg/m³)

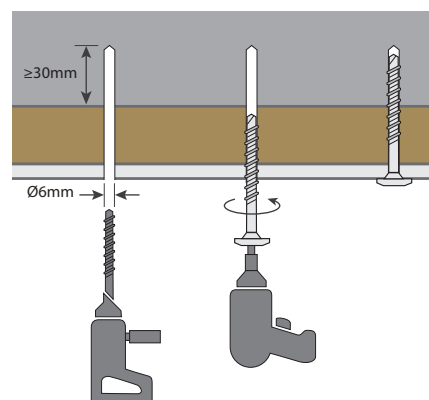

Knauf Insulation Ltd

PO Box 10, Stafford Road, St.Helens, Merseyside, WA10 3NS. UK

Customer Service: 01744 766 766 Technical Support Team: 01744 766 666

All rights reserved, including those of photomechanical reproduction and storage in electronic media. Extreme caution was observed when putting together and processing the information, texts and illustrations in this document. Nevertheless, errors cannot quite be ruled out. The publisher and editors cannot assume legal responsibility or any liability whatsoever for incorrect information and the consequences thereof. The publisher and editors will be grateful for improvement suggestions and details of possible errors pointed out.

KINE4796DAT-V0123

challenge.
create.
care.