


HOMESEAL LDS SOLIPLAN

www.knaufinsulation.com

1-SIDED ADHESIVE TAPE

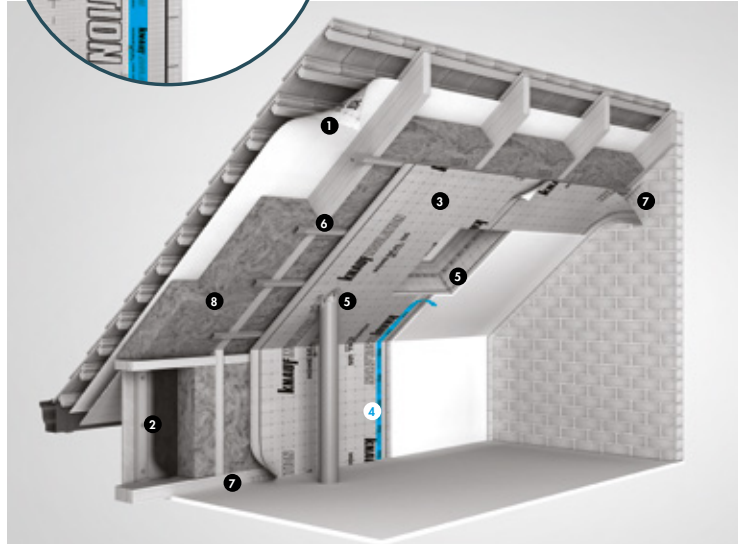

PRODUCT DESCRIPTION

Solventfree, one-sided adhesive tape made of kraftpaper for bonding between Homeseal LDS Vapour Control membrane (Homeseal LDS 2, 5, 35, 40, 100 and FlexPlus).

HOMESEAL[®] SYSTEM

Weather membranes

- HOMESEAL LDS 0.02
- 1 HOMESEAL LDS 0.04
- HOMESEAL LDS 0.04 FIXPLUS
- 2 HOMESEAL LDS 0.02 UV
- HOMESEAL LDS 0.02 UV FIXPLUS

Vapour control layers

- HOMESEAL LDS 2
- HOMESEAL LDS 5
- HOMESEAL LDS 35
- 3 HOMESEAL LDS 40
- HOMESEAL LDS 100
- HOMESEAL LDS 100 ALUPLUS
- HOMESEAL LDS 200 ALUPLUS
- HOMESEAL LDS FLEXPLUS

Tapes and sealants

- 4 HOMESEAL LDS SOLIPLAN
- 5 HOMESEAL LDS SOLIFIT-1
- 6 HOMESEAL LDS SOLIFIT-2
- 7 HOMESEAL LDS SOLIMUR 310

Insulation

- 8 KNAUF INSULATION MINERAL WOOL

SPECIFICATIONS

Release foil	Silicon paper
Adhesive tape carrier	Kraftpaper
Adhesive	Acrylate dispersion, solvent free
Colour of adhesive tape carrier	White
Temperature resistance	-40° C to +100° C
Installation temperature	> -10° C, recommended > +5° C
Thickness (without release foil)	0.35 mm
Roll width	60 mm
Roll length	40 m

HOMESEAL LDS SOLIPLAN

www.knaufinsulation.com

ADDITIONAL INFORMATION

Applications

For use to make an airtight and vapour closed connection of overlapping Homeseal LDS vapour control layer membranes.

Suitable for substrates

- Homeseal LDS vapour control layers,
- Vapour control layers according to EN 13984,
- Wood-based panels with solid surface, oriented strand boards (OSB) according to EN 300,
- Corrosion free metal surfaces and planed timber elements in the interior.

Resistance of the material combinations to ageing

Properly performed adhesions with certified system components are highly resistant to ageing and meet the requirements of ETAG 007 (Guideline for European Technical Approval of timber building kits).

Instructions for use

Please observe the relevant installation guidelines and information provided within the packaging guidance icons. In addition, the relevant standards and recognised rules of technology apply.

Storage

Adhesive tapes should be stored at room temperature and normal humidity (50-70%) and protected from direct sunlight, rain and snow.

APPLICATION GUIDELINES



Place the Homeseal LDS Soliplan, 1-sided adhesive tape, to seal the overlap



Use some pressure to ensure the proper adhesion of the tape on the membrane



The tape is for interior use only

ART.: 504871