

KNAUF INSULATION ULTRASPACE™

April 2018

High-performance vacuum insulation panel, for applications where optimal temperature conditions and efficient use of energy and space are required.



DESCRIPTION

Knauf Insulation Ultraspace™ is an evacuated, high performance thermal vacuum insulation panel with exceptionally low thermal conductivity. It's designed to provide energy efficiency and boost space efficiency of home appliances, temperature controlled packaging, refrigerated transportation systems and any other products or applications that require low energy loss from heat transfer.

Knauf Insulation Ultraspace™ vacuum insulation panels consist of a rigid, highly-porous glass mineral fiber core, evacuated, encased and sealed in a thin laminated, ultra low permeating outer envelope. This prevents outside gases from entering the panel, thereby achieving higher thermal resistance where thin insulation layers are required.

High-tech production technologies ensure uniform fiber distribution, complete evacuation of gases, air-tight seals and close control of product dimensions and performance.

PERFORMANCE

Thermal insulation

Optimal thermal insulation properties ($\lambda_d = 0.003 \text{ W/mK}$) ensure supreme energy efficiency and energy consumption

Certified quality

Complies with RoHS Directive
Complies with REACH Regulation

BENEFITS

- ✓ Extremely low thermal conductivity of 3 mW/mK
- ✓ Low insulation thickness (10 – 25 mm) to increase volume capacity of applications where lack of insulation space is critical
- ✓ Stable, long-term thermal performance
- ✓ Environmentally friendly insulation solution

APPLICATION

Due to extremely low thermal conductivity and minimal thickness, vacuum insulated panels are especially well suited to applications where optimal temperature conditions and efficient use of energy and space are required:

- **Insulation of refrigerators and freezers**, providing lower energy consumption, higher energy efficiency, and greater usable internal volume
- **Refrigerated trucks / transportation systems**
- **Temperature-controlled packaging** (for medical and pharmaceutical industry)
- **Vending machines / cold storage units**

STANDARD

Knauf Insulation Ultraspace™ is manufactured in accordance with ISO 9001 Quality Management Systems, ISO 14001 Environmental Management Systems, ISO 50001 Energy Management Systems and OHSAS 18001 Occupational Health and Safety Management Systems as certified by Bureau Veritas.

CERTIFICATES



KNAUF INSULATION ULTRASPACE™

April 2018

TECHNICAL PROPERTIES:

Characteristics	Symbol	Value	Unit
Density	ρ	200 - 250	kg/m ³
Thermal conductivity	λ	< 3	mW/mK
Operating temperature	-	- 80 to +80	°C
Internal gas pressure	-	1	Pa
Specific heat capacity	C _p	0.84	kJ/kgK
Core material	Glass mineral fibre		
Film	Multi-layers metallized		

STANDARD DIMENSIONS

Thickness: 10 – 25 mm

Panel sizes: 300 × 300 mm to 600 × 1,800 mm


Tolerances:

- Thickness +2/-1mm
- Width/Length: +/-3mm

HANDLING & STORAGE

Knauf Insulation Ultraspace™ is packed on a wooden or plastic pallet. Products are covered with PE foil or wrapped twice with stretch foil, which is designed for short-term protection only. It is recommended to store the product either indoors, or under a cover and off the ground, for a maximum of up to 12 months.

The performance of Ultraspace™ depends on the customer's manufacturing process. Individual customers must optimize and control their manufacturing process to ensure the material meets the requirements of their manufacturing process and their final product.

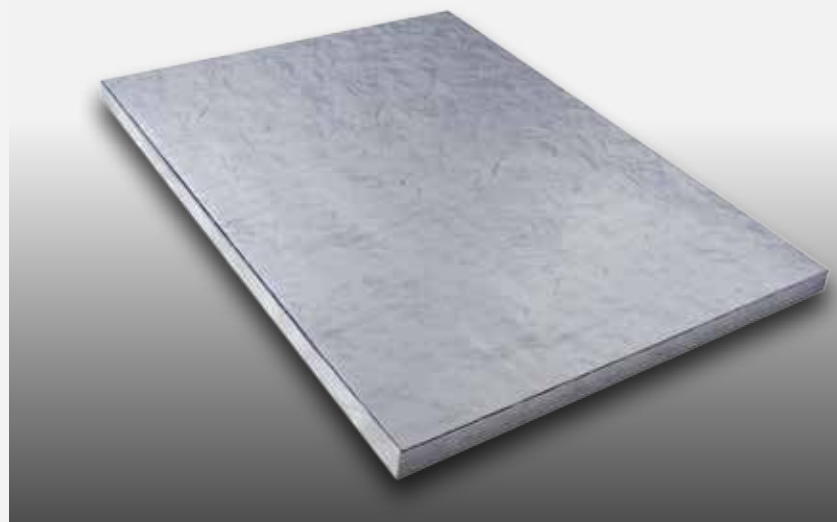

Knauf Insulation, d.o.o.

Trata 32, 4220 Škofja Loka, Slovenia

Tel: +386 (0)4 5114 100

Fax: +386 (0)4 5114 319

E-mail: oem@knaufinsulation.com

For more info visit:

www.oem.knaufinsulation.com

All rights reserved, including those of photomechanical reproduction and storage in electronic media. Commercial use of the processes and work presented in this document is not permitted. Extreme caution was taken in assembling the information, texts and illustrations in this document. Nevertheless, errors cannot be entirely ruled out. The publisher and editors assume no legal responsibility or any liability whatsoever for any incorrect information or any consequences thereof. The publisher and editors are grateful for any suggestions for improvement as well as the identification of any errors.

challenge.
create.
care.